
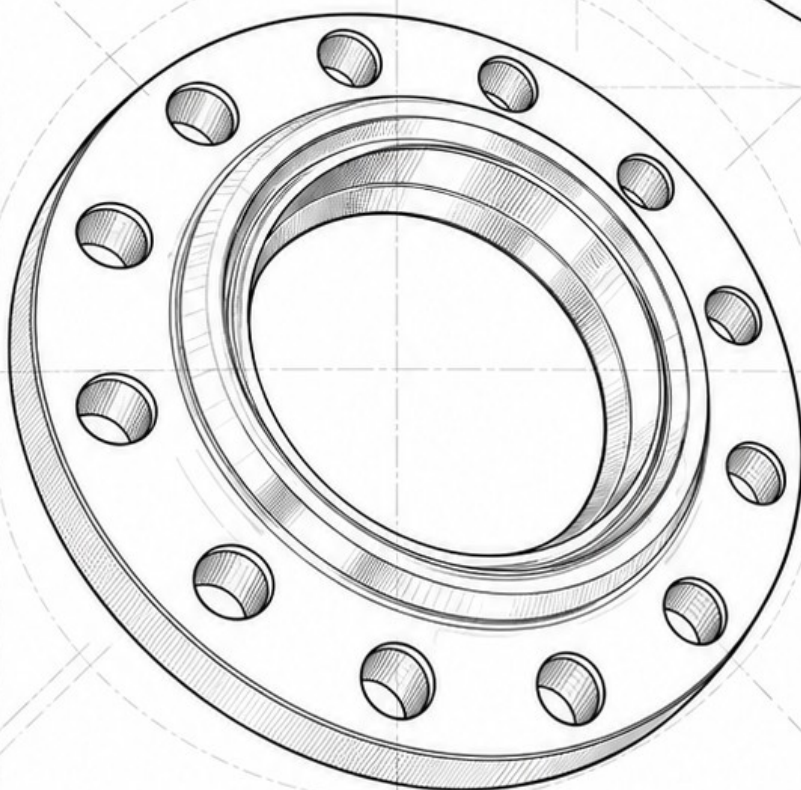


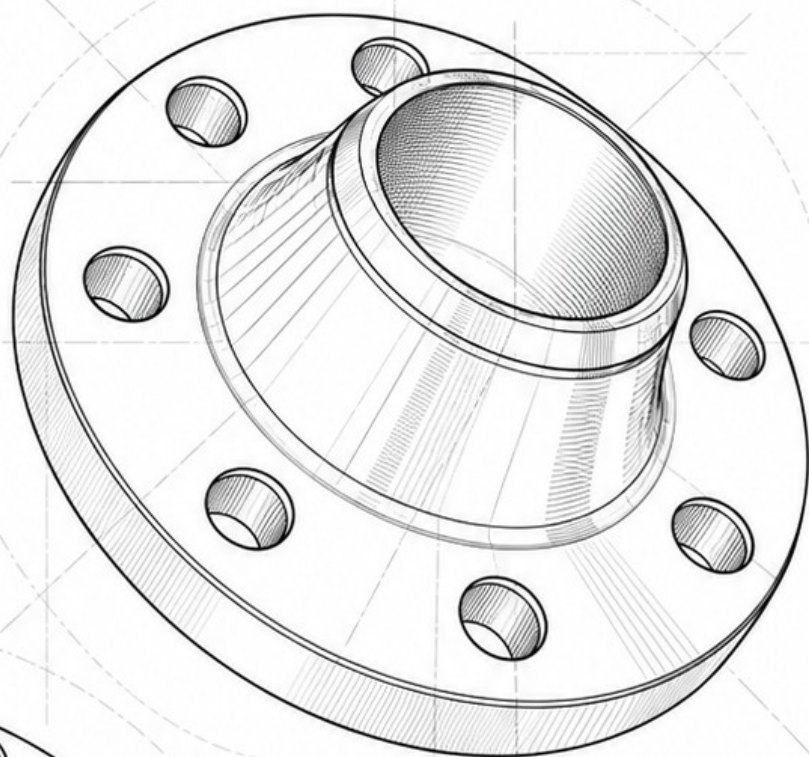

Company

1105, CSSD Tower,
15 Moon Bay Road,
Suzhou Industrial Park,
Jiangsu, 215123, China

+86 510 87818678 ext. 899

info@coolingflowtech.com



PRODUCTS

Product Directory

Flanges



PL Plate Flange

Page 05



SO Slip-on Flange

Page 06



SW Socket Weld Flange

Page 07



WN Weld Neck Flange

Page 08



Threaded Flange

Page 09

Custom Components



Tubesheet Flange

Page 10



PRODUCTION

Factory & Production



Workshop interior



Heating operation



Machining operation



Workshop equipment



PRODUCTION

Equipment & Inspection



Production equipment



Machining equipment




Inspection

Testing and laboratory equipment



QUALIFICATIONS


Certifications

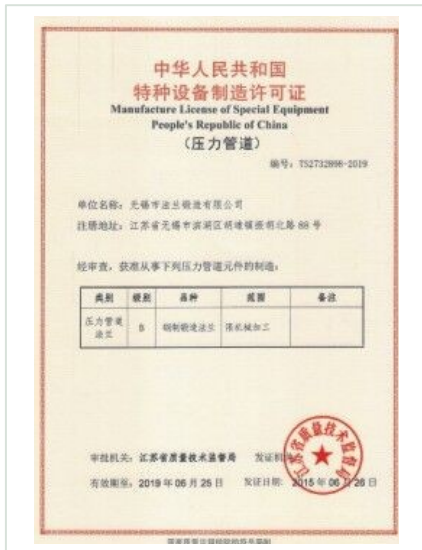

WXF-01



WXF-02

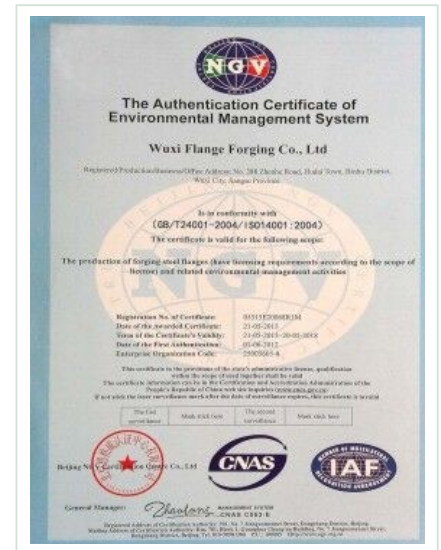


WXF-03



PK-01



PK-02

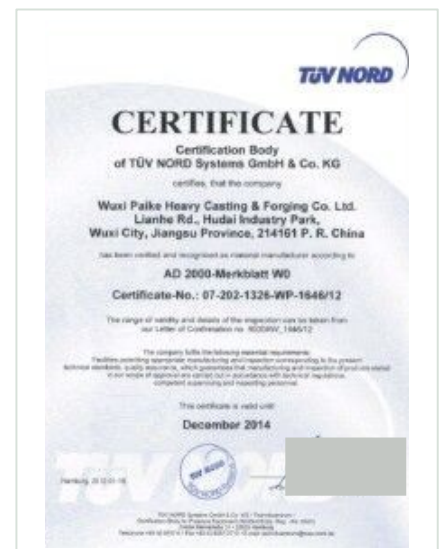

PK-03

PL Plate Flange

1.6 MPa / DN 10–600



Nominal sizes & hole counts

Nominal size (DN)	Holes
10, 15, 20, 25, 32, 40, 50, 65	4
80, 100, 125, 150, 200	8
250, 300	12
350, 400	16
450, 500, 600	20

Machining workshop



All listed sizes: 1.6 MPa. Product image illustrates the type.

SO Slip-on Flange



Standards reference

Group	Reference
ASME	B16.5
EN	1092-1
JIS	B2220
HG	20592–20635
SH	3406

Machining workshop



Reference standards; the applicable edition and specification follow the confirmed order.

SW Socket Weld Flange



Standards reference

Group	Reference
ASME	B16.5
EN	1092-1
JIS	B2220
HG	20592-20635
SH	3406

Product inspection



Reference standards; the applicable edition and specification follow the confirmed order.

WN Weld Neck Flange

1.6 MPa / DN 10–600



Nominal sizes & hole counts

Nominal size (DN)	Holes
10, 15, 20, 25, 32, 40, 50, 65	4
80, 100, 125, 150, 200	8
250, 300	12
350, 400	16
450, 500, 600	20

Machining workshop



All listed sizes: 1.6 MPa. Product image illustrates the type.

Threaded Flange

1.6 MPa / DN 10–600



Nominal sizes & hole counts

Nominal size (DN)	Holes
10, 15, 20, 25, 32, 40, 50, 65	4
80, 100, 125, 150, 200	8
250, 300	12
350, 400	16
450, 500, 600	20

Inspection equipment



All listed sizes: 1.6 MPa. Product image illustrates the type.



Tubesheet Flange

Custom component



Specification basis

Custom component

Dimensions, material and applicable standard to be agreed for the individual order.

Material cutting



The photograph shows one configuration; it does not define a standard size range.



REFERENCE

Standards & Materials

Reference list only. Product standards and material grades follow the confirmed order specification.

Standards

Group	References in the supplied list
GB / JB / HG / SH	GB/T4700-4707; GB/T9112-9124 JB/T4726-4728; JB/T6396-6398 HG20592-20635; SH3406
ASTM / ASME	ASME B16.5; A403/A403M; A182/A182M A105/A105M; A234/A234M; A350/A350M
JIS	G3214; JIS B2220
DIN	DIN 2512; DIN 86030
EN	EN10222-1~5

Applicable standards and editions follow the confirmed order specification.

Material grades

Stainless steel	Carbon steel	Alloy steel
F304 (1.4301) F304L (1.4307) F321 (1.4541) F316L (1.4404) F316Ti (1.4571) F347 (1.4550) F310/310S F51 (1.4462) F53 (1.4410) F55 (1.4501); F60	Q345 20 / 35 / 45 20Mn / 50Mn A105N C22.8 / P250GH A350LF2 TstE355	15CrMo / 35CrMo 42CrMo / 1Cr5Mo 12CrMoV F5 / F9 / F11 / F22